


## Input/Output Stream Adapter

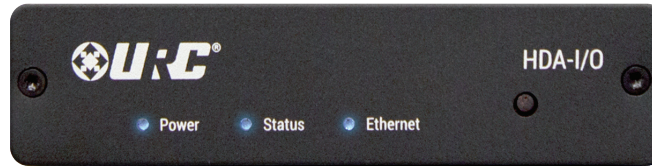

### OVERVIEW

The HDA-I/O can be set in software to be used as an HDA Audio Stream Receiver or a Stream Injector. Small in size, this flexible piece can be placed nearly anywhere to deliver high resolution streaming audio from the TV or other non-rack mounted devices throughout your home or commercial environment, or feed audio out of the HDA system to an external amplifier or A/V receiver.

### HIGHLIGHTS

- 96 kHz / 24-bit streaming high-definition audio quality
  - Dolby Digital® and DTS® 5.1 channel Downmixing (digital inputs only)
  - Audio ducking capability
  - Store up to 10 .WAV Files in each amplifier (for doorbell ring chime and/ or trigger alert chimes)
  - Inputs:
    - 1 RCA analog input
    - 1 TOSLink digital input
    - 1 Coaxial digital input
    - 12 Volt DC Input (power)
  - Outputs:
    - 1 RCA analog output
    - 1 TOSLink digital output
    - 1 Coaxial digital output
    - 12 Volt DC Control output
  - Powered by 12 VDC adapter or Power Over Ethernet injector
  - Wall / Joist Bracket included
- \*HDA-SW5 AVB Network Switch is needed when more than 1 HDA product is installed

### SPECIFICATIONS

- SKU**  
HDA-I/O, UPC 656787-503045
- System**  
Total Control®  
Advanced system controller and professional programming required
- In the Box**  
HDA-I/O, 12 Volt DC Power, US, EU, UK Plug Converter, Left / Right L Brackets, Rubber Feet
- Dimensions**  
125.4mm (4.94") W x 36.5mm (1.44") H x 127mm (5") D
- Weight**  
0.29 kg (0.65 lbs)
- Warranty**  
2 year limited warranty

✉ [totalcontrol@urc-automation.com](mailto:totalcontrol@urc-automation.com)

🌐 [www.urc-automation.com](http://www.urc-automation.com)

