


marantz

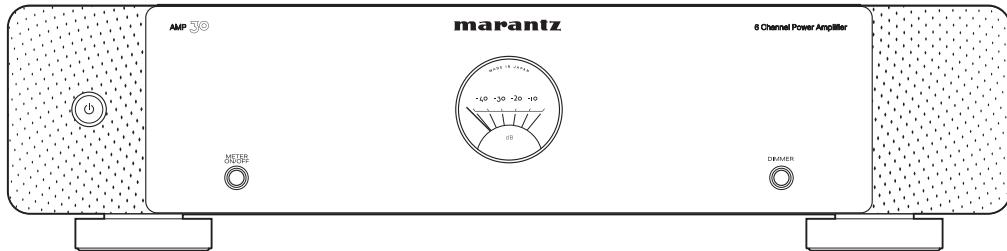

AMP 30 | Power Amplifier

QUICK START GUIDE

Welcome

Thank you for choosing a Marantz power amplifier.

Connecting a Marantz AV Preamplifier and speakers (sold separately) to this unit enables use of a variety of surround sound systems. This guide describes how to connect AV Preamplifier and speakers to this unit.

Please do not return this unit to the store – call for assistance.

If you need help... :

If you need additional help in solving problems, contact Marantz customer service in your area.

www.marantz.com

Before you begin

Required for setup

RCA cables



or


XLR cables



AV Preamplifier



Speakers




Speaker cables



What's in the box

Quick start guide



Safety instructions



Power amplifier



Power cord



REMOTE CONTROL
connector cable



AMP CONTROL
connector cable



EN

DE

FR

IT

ES

NL

SV

RU

PL

Setup

1 Connect your speakers

There are 3 modes for connecting this unit with speakers:

- Normal mode
- Bi-amp mode
- BTL mode (Bridge mode)


Set the NORMAL/BI-AMP/BTL selector on the rear panel of this unit according to the connection mode used.

NOTE

Always set the NORMAL/BI-AMP/BTL selector before turning on the power. If the setting is changed after turning on the power, the setting will not be applied.


■Normal mode

Connect your speaker cables between the AMP 30 and your speakers. This is the default setup, where you simply connect the speakers directly to the corresponding pair of terminals.

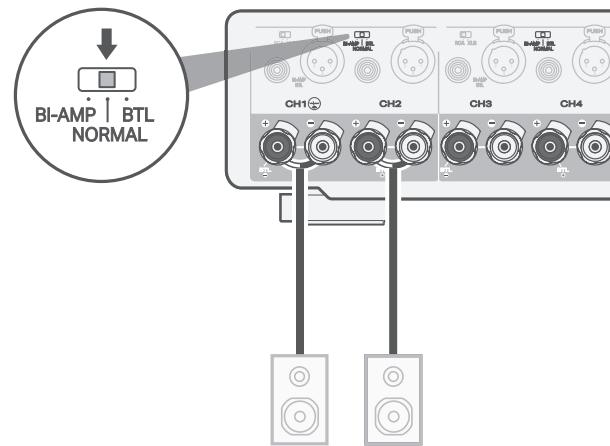

■ Bi-amp mode


Connecting separate amplifiers to the tweeter terminal and woofer terminal of a speaker that supports bi-amplification enables playback with higher sound quality.

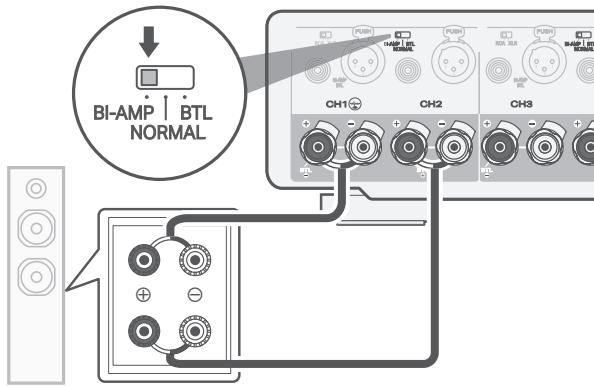

- When making bi-amp mode, be sure to remove the short-circuiting plate or wire between the speaker's woofer and tweeter terminals.

■ BTL mode (Bridge mode)

Using 2 amplifiers to drive 1 speaker enables more powerful playback.

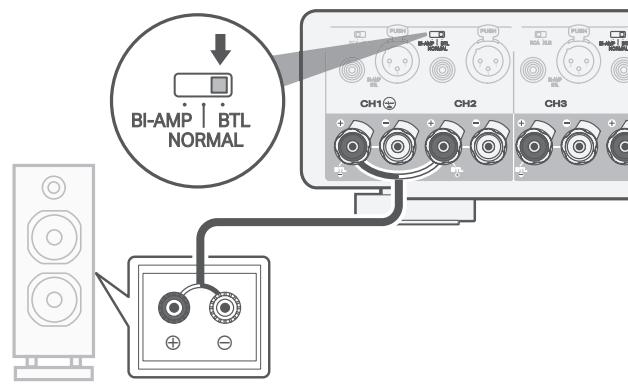

- For the highest power set-up, the BTL mode can convert the 2 x 200 W at 8 ohms stereo amplifier to a 400 W mono amplifier. The two-amplifier circuit construction guarantees an excellent signal to noise ratio and the full control of any speaker.


2 Connect your AV Preamplifier

There are 2 methods for connecting this unit with an AV Preamplifier... an unbalanced connection or a balanced connection. Set the RCA/XLR INPUT selector on the rear panel of this unit according to the connection method used.


NOTE

Always set the RCA/XLR INPUT selector before turning on the power. If the setting is changed after turning on the power, the setting will not be applied.

■ Connect the UNBALANCED RCA INPUT connector

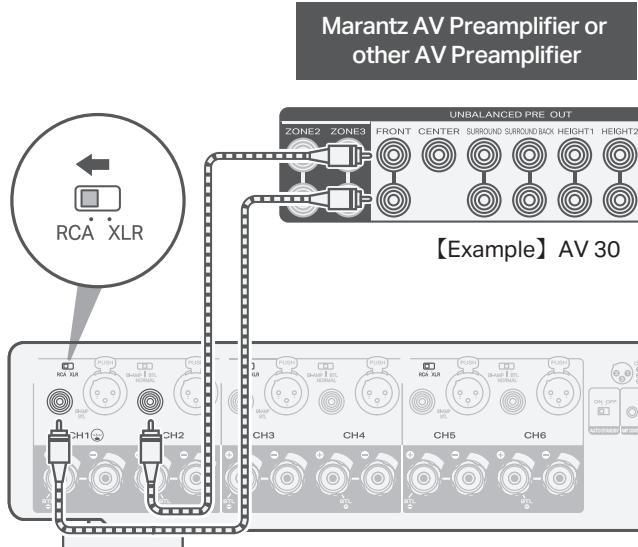


■ Connect the BALANCED XLR INPUT connector

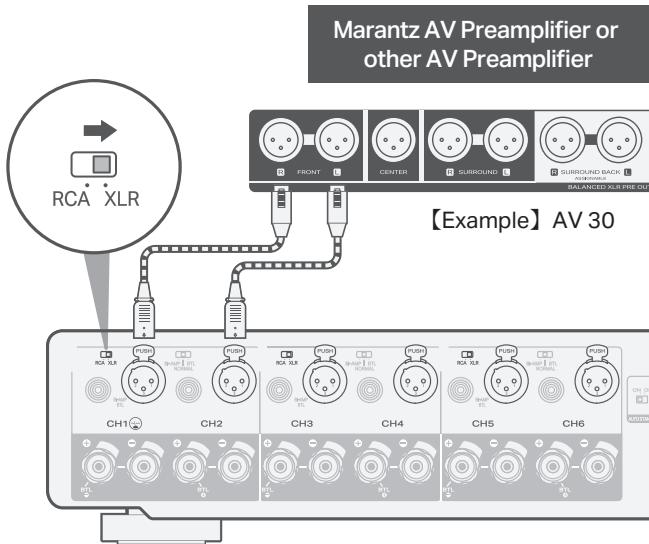


NOTE

When connecting speakers using a bi-amp connection or BTL connection, connect BALANCED XLR or UNBALANCED RCA to an odd-numbered channel (CH1, CH3, CH5). Do not connect to an even-numbered channel (CH2, CH4, CH6).

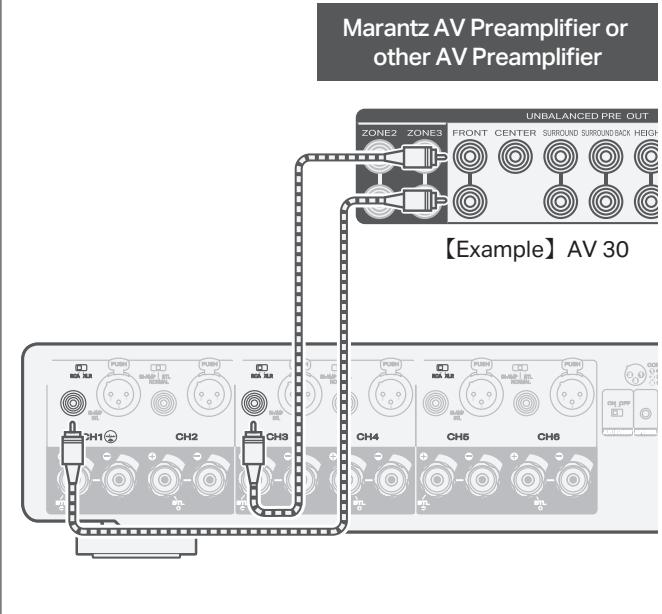


3 Connect the power cord

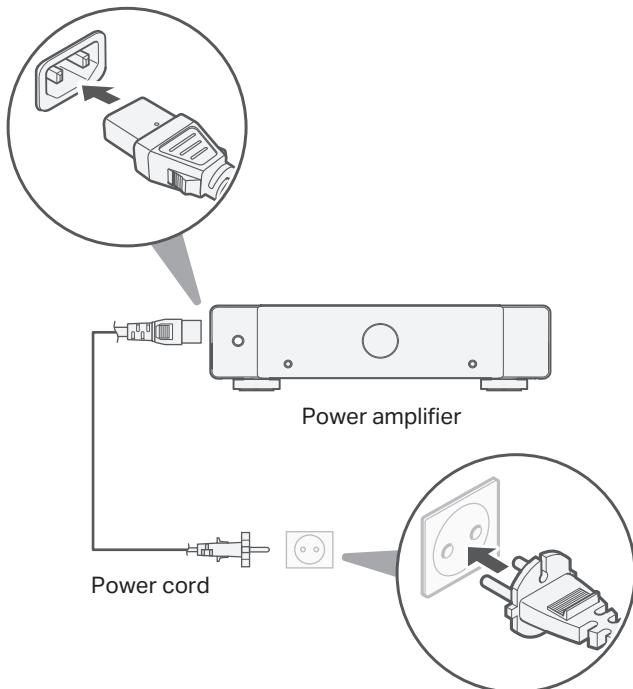

4 Turn on the power amplifier

Press the **Power** button on the power amplifier.

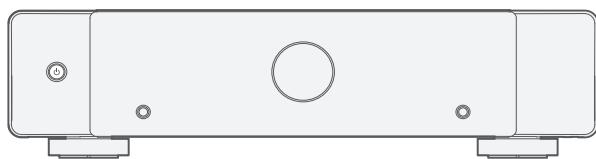

Control cables (included)

The AMP 30 comes with the following two types of control cables. Choose between the two to suit the type of device you are connecting.

AMP CONTROL connector cable

When the AMP 30 is connected to a Marantz AV Preamplifier with an AMP CONTROL terminal, the following linked operations can be performed.

- When the AV Preamplifier is turned on or put on standby, the same operation is applied to the AMP 30.
- When the display brightness setting of the AV Preamplifier is changed, the new setting is also applied to the front panel lights of the AMP 30.

REMOTE CONTROL connector cable

When the AMP 30 is connected to a Marantz product with a REMOTE CONTROL terminal, the following linked operations can be performed.

- When a Marantz product is turned on or put on standby, the same operation is applied to the AMP 30.

Refer to the owner's manual for details such as instructions on connecting.

Owner's manual

Refer to the online manual for other functions, information and operation procedure details.

manuals.marantz.com/AMP30/EU/EN/



For more information, visit www.marantz.com

marantz

5411 12159 00AS